



# 43" EDGE Pro



**THREE LED TECHNOLOGIES.  
TWO MOUNTING METHODS.  
ONE PLATFORM.**

**SMD | FLIP CHIP SMD | FLIP CHIP (High Brightness)**

**With the power of the  
Edge Pro platform and  
V1 Architecture you're  
set for years to come.**

The 43" Edge Pro and its underlying technologies work in synergy, allowing you to upgrade to a higher resolution or brightness whenever you like without changing the cabinet hardware.



\* GOB optional

## SMD

The EDGE Pro takes full advantage of our high quality SMD technology. Content has never looked better.

This traditional LED pixel technology offers great value for money and stunning visual performance.

Up to  
**800 nits**   
peak brightness

**16:9**   
aspect ratio

**sRGB**   
colour gamut

**22 bit**  
grayscale

## Flip Chip SMD

When the very best of the The LED Studio & VOD combine – The result is simply outstanding.

If 800 nits isn't enough then perhaps 1200 nits is. Capable of 1200 nits of peak brightness, all whilst running cool, this technology saves you money through superior energy efficiency; the result is an LED display that is cool to the touch whilst being impactfully bright.

Up to  
**1,200 nits**   
peak brightness for your HDR photos and videos

Up to  
**40%**   
energy saving

**DCI-P3**   
wide colour gamut

Up to  
**1.5x**   
brighter than standard SMD

## Flip Chip SMD (high-bright)

If 2000 nits doesn't hit the spot, maybe 4000 nits will.

Designed for exterior facing windows or applications with high ambient light, our Flip Chip high bright technology is designed to light up any space. Welcome to narrow pixel pitch technology that can be seen from miles around.

Up to  
**4,000 nits**   
peak brightness for your HDR photos and videos

Up to  
**40%**   
energy saving

**DCI-P3**   
wide colour gamut

Up to  
**4x**   
brighter than standard SMD





**16:9 aspect ratio**



**Light weight 11kg per cabinet**



**Up to 40% energy saving\***



**Superior colour accuracy**



**GOB - glue on board optional**




**V1 Architecture was created to minimize environmental impact. It enables users to change pixel technologies whilst retaining the cabinets and internal components.**

## Two mounting methods

Having the freedom to attach a LED display to an existing mounting solution can make a big difference. The industry standard VESA or wall mounting options enables the EDGE Pro platform to be attached in a matter of seconds for quick and easy mounting.



Wall mounts

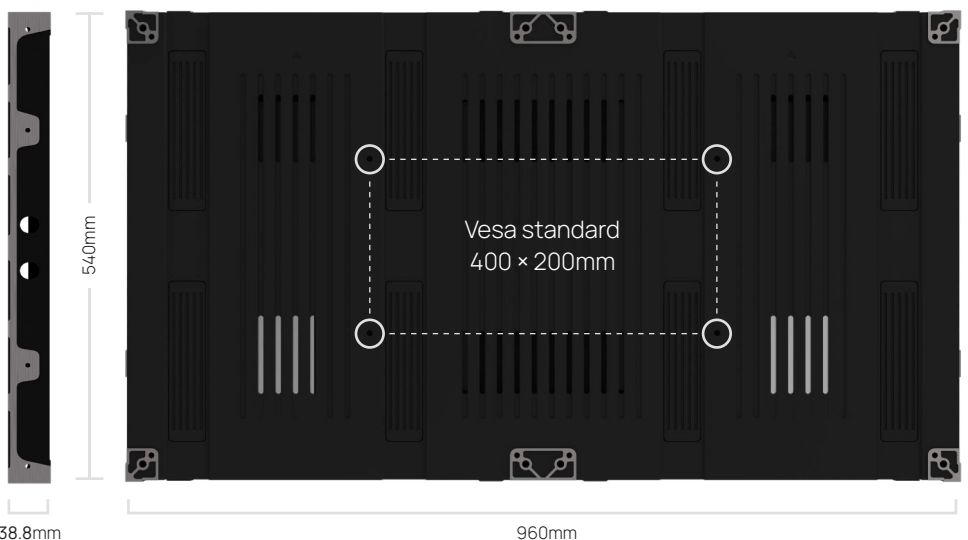

# SPECIFICATIONS

## SMD

PHYSICAL PARAMETERS						
Pixel Pitch (mm)	0.9375	1.25	1.5	1.875	2.0	2.5
Unit Size (W × H × D)	960 × 540 × 38.8mm 37.79 × 21.25 × 1.52in	960 × 540 × 38.8mm 37.79 × 21.25 × 1.52in	960 × 540 × 38.8mm 37.79 × 21.25 × 1.52in	960 × 540 × 38.8mm 37.79 × 21.25 × 1.52in	960 × 540 × 38.8mm 37.79 × 21.25 × 1.52in	960 × 540 × 38.8mm 37.79 × 21.25 × 1.52in
Unit Weight (kg / lbs)	11 / 24.25	11 / 24.25	11 / 24.25	11 / 24.25	11 / 24.25	11 / 24.25
OPTICAL PARAMETERS						
Unit Resolution	1024 × 576	768 × 432	640 × 360	512 × 288	480 × 270	384 × 216
Aspect Ratio	16:9	16:9	16:9	16:9	16:9	16:9
Brightness (nits = cd/m²)	≤600	≤600	≤600	≤800	≤800	≤800
Refresh Rate (Hz)	≤3,840	≤3,840	≤3,840	≤3,840	≤3,840	≤3,840
Color Temperature (K)	2,500 ~ 10,000	2,500 ~ 10,000	2,500 ~ 10,000	2,500 ~ 10,000	2,500 ~ 10,000	2,500 ~ 10,000
ELECTRICAL PARAMETERS						
Power Consumption Max (W/m² / W/ft²)	≤540 / 50	≤540 / 50	≤510 / 47	≤600 / 56	≤560 / 52	≤520 / 48
Power Consumption Typical (W/m² / W/ft²)	≤210 / 20	≤210 / 20	≤200 / 19	≤240 / 22	≤220 / 20	≤210 / 20
Working Voltage	AC:100V ~ 240V, 50 ~ 60 Hz	AC:100V ~ 240V, 50 ~ 60 Hz	AC:100V ~ 240V, 50 ~ 60 Hz	AC:100V ~ 240V, 50 ~ 60 Hz	AC:100V ~ 240V, 50 ~ 60 Hz	AC:100V ~ 240V, 50 ~ 60 Hz
ADDITIONAL FEATURES						
Lifetime (Hours)	100,000	100,000	100,000	100,000	100,000	100,000
Operating Temp (°C / °F)	-20 ~ +60 / -4 ~ +140	-20 ~ +60 / -4 ~ +140	-20 ~ +60 / -4 ~ +140	-20 ~ +60 / -4 ~ +140	-20 ~ +60 / -4 ~ +140	-20 ~ +60 / -4 ~ +140
Humidity Range (%)	10 ~ 90	10 ~ 90	10 ~ 90	10 ~ 90	10 ~ 90	10 ~ 90

## FLIP CHIP SMD

PHYSICAL PARAMETERS						
Pixel Pitch (mm)	1.25	1.5	1.875	2.0	2.5	
Unit Size (W × H × D)	960 × 540 × 38.8mm 37.79 × 21.25 × 1.52in	960 × 540 × 38.8mm 37.79 × 21.25 × 1.52in	960 × 540 × 38.8mm 37.79 × 21.25 × 1.52in	960 × 540 × 38.8mm 37.79 × 21.25 × 1.52in	960 × 540 × 38.8mm 37.79 × 21.25 × 1.52in	960 × 540 × 38.8mm 37.79 × 21.25 × 1.52in
Unit Weight (kg / lbs)	11 / 24.25	11 / 24.25	11 / 24.25	11 / 24.25	11 / 24.25	11 / 24.25
OPTICAL PARAMETERS						
Unit Resolution	768 × 432	640 × 360	512 × 288	480 × 270	384 × 216	
Aspect Ratio	16:9	16:9	16:9	16:9	16:9	
Brightness (nits = cd/m²)	≤1,200	≤1,200	≤2,000	≤1,200	≤1,200	
Refresh Rate (Hz)	≤3,840	≤3,840	≤3,840	≤3,840	≤3,840	
Color Temperature (K)	2,500 ~ 10,000	2,500 ~ 10,000	2,500 ~ 10,000	2,500 ~ 10,000	2,500 ~ 10,000	
ELECTRICAL PARAMETERS						
Features	Common Cathode	Common Cathode	Common Cathode	Common Cathode	Common Cathode	Common Cathode
Power Consumption Max (W/m² / W/ft²)	≤900 / 84	≤840 / 78	≤780 / 72	≤720 / 67	≤660 / 61	
Power Consumption Typical (W/m² / W/ft²)	≤360 / 33	≤330 / 31	≤310 / 29	≤290 / 27	≤260 / 24	
Working Voltage	AC:100V ~ 240V, 50 ~ 60 Hz	AC:100V ~ 240V, 50 ~ 60 Hz	AC:100V ~ 240V, 50 ~ 60 Hz	AC:100V ~ 240V, 50 ~ 60 Hz	AC:100V ~ 240V, 50 ~ 60 Hz	AC:100V ~ 240V, 50 ~ 60 Hz
ADDITIONAL FEATURES						
Lifetime (Hours)	100,000	100,000	100,000	100,000	100,000	
Operating Temp (°C / °F)	-20 ~ +60 / -4 ~ +140	-20 ~ +60 / -4 ~ +140	-20 ~ +60 / -4 ~ +140	-20 ~ +60 / -4 ~ +140	-20 ~ +60 / -4 ~ +140	
Humidity Range (%)	10 ~ 90	10 ~ 90	10 ~ 90	10 ~ 90	10 ~ 90	

## FLIP CHIP SMD (High Brightness)

PHYSICAL PARAMETERS			
Pixel Pitch (mm)	1.25	1.5	1.875
Unit Size (mm / W × H × D)	960 × 540 × 38.8mm 37.79 × 21.25 × 1.52in	960 × 540 × 38.8mm 37.79 × 21.25 × 1.52in	960 × 540 × 38.8mm 37.79 × 21.25 × 1.52in
Unit Weight (kg / lbs)	11 / 24.25	11 / 24.25	11 / 24.25
OPTICAL PARAMETERS			
Unit Resolution	768 × 432	640 × 360	512 × 288
Aspect Ratio	16:9	16:9	16:9
Brightness (nits = cd/m²)	≤4,000	≤4,000	≤4,000
Refresh Rate (Hz)	≤3,840	≤3,840	≤3,840
Color Temperature (K)	2,500 ~ 10,000	2,500 ~ 10,000	2,500 ~ 10,000
ELECTRICAL PARAMETERS			
Features	Common Cathode	Common Cathode	Common Cathode
Power Consumption Max (W/m² / W/ft²)	≤800 / 74	≤760 / 71	≤720 / 67
Power Consumption Typical (W/m² / W/ft²)	≤320 / 30	≤300 / 28	≤290 / 27
Working Voltage	AC:100V ~ 240V, 50 ~ 60 Hz	AC:100V ~ 240V, 50 ~ 60 Hz	AC:100V ~ 240V,, 50 ~ 60 Hz
ADDITIONAL FEATURES			
Lifetime (Hours)	100,000	100,000	100,000
Operating Temp (°C / °F)	-20 ~ +60 / -4 ~ +140	-20 ~ +60 / -4 ~ +140	-20 ~ +60 / -4 ~ +140
Humidity Range (%)	10 ~ 90	10 ~ 90	10 ~ 90

\*40% energy saving is calculated vs SMD technology when Flip Chip technology is run at a comparable brightness of 800nits.  
\*All data contained is subject to change.



LED display technology  
for tomorrow's world.

Please contact us if you have any questions,  
we're always happy to help

**[www.theledstudio.com](http://www.theledstudio.com)**  
**[sales@theledstudio.co.uk](mailto:sales@theledstudio.co.uk)**

**UK Showroom**

The Pavilion  
Merchant Square  
London, W2 1JZ  
United Kingdom

Tel: +44 (0) 20 3832 9500

**Head Office**

Unit 3 Clearwater Business Park  
Frankland Road  
Swindon, SN5 8YZ  
United Kingdom

Tel: +44 (0) 20 3852 9500

**EMEA Office**

169-171 Makarios III Avenue  
Cedars Oasis Tower  
3027, Limassol  
Cyprus

Tel: +357 9625 8848

**USA Office**

22 Boston Wharf Road,  
7th Floor,  
Boston, MA 02210  
United States

Tel: +1 (833) 533-7836

**USA Showroom**

123 Heiman Street, Suite 200,  
San Antonio,  
Texas 78205  
United States

Tel: +1 (833) 533-7836