



**SCREEN SIZE:
108", 130", 136", 163", 217"**

16:9 ALL-IN-ONE FINE PITCH (SMD/COB)

One display meets all needs.

The Android 11.0 system is integrated into the display, offering a range of input and output ports. It boasts dual-channel surround sound and the ability to operate on two different systems simultaneously.

For added convenience, users have the option of incorporating an infrared touch control for instant interaction, which facilitates effortless writing and enhances the overall meeting experience. Furthermore, the device offers various WIFI modes, allowing for seamless sharing without the constraints of additional cable systems.



*GOB Optional



16 bit 
grayscale

Up to **1000nits** 
peak brightness for your HDR photos and videos

3840-7680Hz
high refresh rate

2000-12000K 
color temp

1080P&4K 
resolutions available



16:9 Aspect Ratio



Superwide Viewing Angle



GOB Optional Upgrade



Infrared Touch Optional




Mobile or Wall Mountable



Easy Maintenance



Front Service

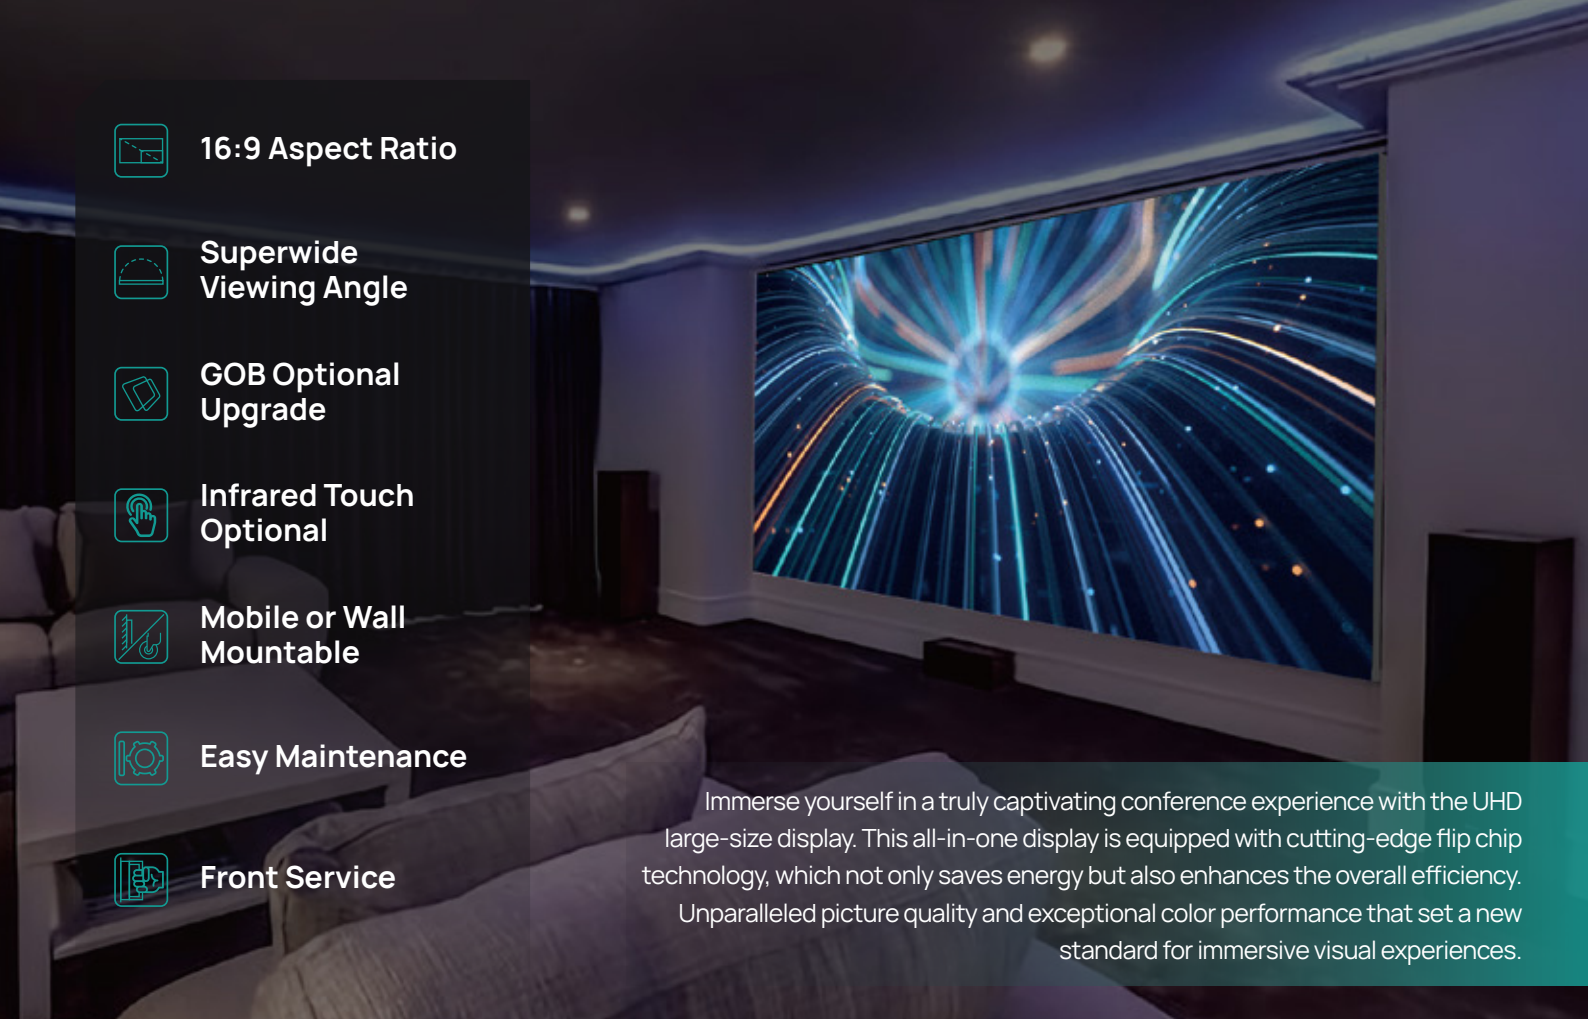

Immerse yourself in a truly captivating conference experience with the UHD large-size display. This all-in-one display is equipped with cutting-edge flip chip technology, which not only saves energy but also enhances the overall efficiency. Unparalleled picture quality and exceptional color performance that set a new standard for immersive visual experiences.

Product Overview



SPECIFICATIONS

EVA Lite(2K)

	108-2K	130-2K	136-2K	163-2K	217-2K
PHYSICAL PARAMETERS					
Pixel Pitch (mm)	P1.25	P1.5	P1.56	P1.875	P2.5
Pixel Configuration	COB/SMD	COB	COB/SMD	SMD	SMD
Display Size (mm) (W×H)	2400×1350	2880×1620	3000×1687.5	3600×2025	4800×2700
Overall Weight (kg)	80	115	120	172	305
OPTICAL PARAMETERS					
Resolution (W×H)	1920×1080	1920×1080	1920×1080	1920×1080	1920×1080
Frame Rate (Hz)	50/60	50/60	50/60	50/60	50/60
Refresh Rate (Hz)	3840~7680	3840~7680	3840~7680	3840~7680	3840~7680
Brightness (nits)	1000	1000	1000	800	1000
Gray Scale (bit)	14~16	14~16	14~16	14~16	14~16
Color Temp (K)	2000~12000	2000~12000	2000~12000	2000~12000	2000~12000
ELECTRICAL PARAMETERS					
Max. Power Consumption (W)	≤1620	≤2300	≤2530	≤4300	≤7120
Avg. Power Consumption (W)	≤650	≤930	≤1020	≤1750	≤2850
Working Voltage (V)	AC: 110V~240V, 50~60Hz	AC: 110V~240V, 50~60Hz	AC: 110V~240V, 50~60Hz	AC: 110V~240V, 50~60Hz	AC: 110V~240V, 50~60Hz
ADDITIONAL FEATURES					
Lifetime (Hrs)	100,000	100,000	100,000	100,000	100,000
Operation Humidity (RH)	10%~80%	10%~80%	10%~80%	10%~80%	10%~80%
Control Panel Type	Remote control / Touch panel	Remote control / Touch panel	Remote control / Touch panel	Remote control / Touch panel	Remote control / Touch panel
Interface	HDMI×3, 3.5×1, USB3.0×1, USB2.0×1, RJ45×1	HDMI×3, 3.5×1, USB3.0×1, USB2.0×1, RJ45×1	HDMI×3, 3.5×1, USB3.0×1, USB2.0×1, RJ45×1	HDMI×3, 3.5×1, USB3.0×1, USB2.0×1, RJ45×1	HDMI×3, 3.5×1, USB3.0×1, USB2.0×1, RJ45×1
WIFI Mode	Wifi-5G band×1, Wifi-2.4G band×1, Wifi-AP×1	Wifi-5G band×1, Wifi-2.4G band×1, Wifi-AP×1	Wifi-5G band×1, Wifi-2.4G band×1, Wifi-AP×1	Wifi-5G band×1, Wifi-2.4G band×1, Wifi-AP×1	Wifi-5G band×1, Wifi-2.4G band×1, Wifi-AP×1

EVA Lite(4K)

	108-4K	130-4K	136-4K	163-4K	217-4K
PHYSICAL PARAMETERS					
Pixel Pitch (mm)	P0.625	P0.75	P0.78	P0.93	P1.25
Pixel Configuration	COB	COB	COB	COB	COB
Display Size (mm) (W×H)	2400×1350	2880×1620	3000×1687.5	3600×2025	4800×2700
Overall Weight (kg)	80	115	120	174	305
OPTICAL PARAMETERS					
Resolution (W×H)	3840×2160	3840×2160	3840×2160	3840×2160	3840×2160
Frame Rate (Hz)	50/60	50/60	50/60	50/60	50/60
Refresh Rate (Hz)	3840~7680	3840~7680	3840~7680	3840~7680	3840~7680
Brightness (nits)	1000	1000	1000	1000	1000
Gray Scale (bit)	14~16	14~16	14~16	14~16	14~16
Color Temp (K)	2000~12000	2000~12000	2000~12000	2000~12000	2000~12000
ELECTRICAL PARAMETERS					
Max. Power Consumption (W)	≤1940	≤2800	≤3030	≤3650	≤5830
Avg. Power Consumption (W)	≤770	≤1120	≤1210	≤1460	≤2330
Working Voltage (V)	AC: 110V~240V, 50~60Hz	AC: 110V~240V, 50~60Hz	AC: 110V~240V, 50~60Hz	AC: 110V~240V, 50~60Hz	AC: 110V~240V, 50~60Hz
ADDITIONAL FEATURES					
Lifetime (Hrs)	100,000	100,000	100,000	100,000	100,000
Operation Humidity (RH)	10%~80%	10%~80%	10%~80%	10%~80%	10%~80%
Control Panel Type	Remote control / Touch panel	Remote control / Touch panel	Remote control / Touch panel	Remote control / Touch panel	Remote control / Touch panel
Interface	HDMI×3, 3.5×1, USB3.0×1, USB2.0×1, RJ45×1	HDMI×3, 3.5×1, USB3.0×1, USB2.0×1, RJ45×1	HDMI×3, 3.5×1, USB3.0×1, USB2.0×1, RJ45×1	HDMI×3, 3.5×1, USB3.0×1, USB2.0×1, RJ45×1	HDMI×3, 3.5×1, USB3.0×1, USB2.0×1, RJ45×1
WIFI Mode	Wifi-5G band×1, Wifi-2.4G band×1, Wifi-AP×1	Wifi-5G band×1, Wifi-2.4G band×1, Wifi-AP×1	Wifi-5G band×1, Wifi-2.4G band×1, Wifi-AP×1	Wifi-5G band×1, Wifi-2.4G band×1, Wifi-AP×1	Wifi-5G band×1, Wifi-2.4G band×1, Wifi-AP×1

*All specifications are subject to change according to the specific situation of the project (the product shall be subjected to the submitted contract specification)

Contact us: +44 (0)20 3832 9500

www.vod-visual.co.uk

Version 1.3

VOD |  LEDstudio

VCD

POWERED BY

 **LEDstudio**

Please contact us if you have any questions,
we're always happy to help

www.vod-visual.co.uk
info@vod-visual.co.uk

UK Showroom

The Pavilion
Merchant Square
London, W2 1JZ
United Kingdom

Tel: +44 (0) 20 3832 9500

Head Office

Unit 3 Clearwater Business Park
Frankland Road
Swindon, SN5 8YZ
United Kingdom

Tel: +44 (0) 20 3852 9500

EMEA Office

169-171 Makarios III Avenue
Cedars Oasis Tower
3027, Limassol
Cyprus

Tel: +357 9625 8848

USA Office

22 Boston Wharf Road,
7th Floor,
Boston, MA 02210
United States

Tel: +1 (833) 533-7836

USA Showroom

123 Heiman Street, Suite 200,
San Antonio,
Texas 78205
United States

Tel: +1 (833) 533-7836