



54" EDGE Pro (COB MicroLED)

ENERGY EFFICIENCY AT ITS CORE

LOOK BEST EVERYDAY

PIXEL PITCHES:
P0.625, 0.78, 0.93, 1.25, 1.56

PIXEL TECHNOLOGY:
COB FLIP CHIP (COMMON CATHODE)


The EDGE Series just got better!

The 54" EDGE Pro is a groundbreaking advancement in LED display technology, evolving from its Award Winning predecessor, the 55" EDGE.


This innovative model enhances sustainability by employing Chip on Board, Flip Chip Common Cathode pixel technologies, as well as the traditional SMD options.

These cutting-edge features ensure superior energy efficiency, making the 54" EDGE Pro a smarter and more eco-friendly choice for top-tier fine pitch LED display applications.

PIXEL COMPARISON DIAGRAM

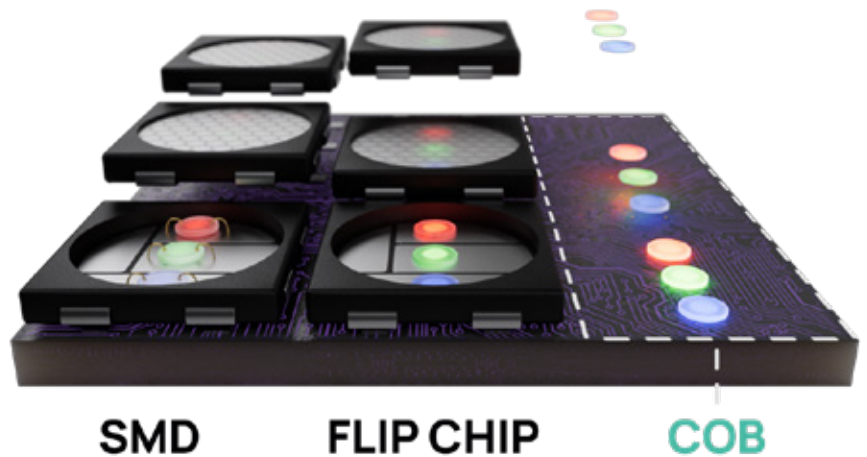

FIXED RESOLUTIONS OR CUSTOM SIZES

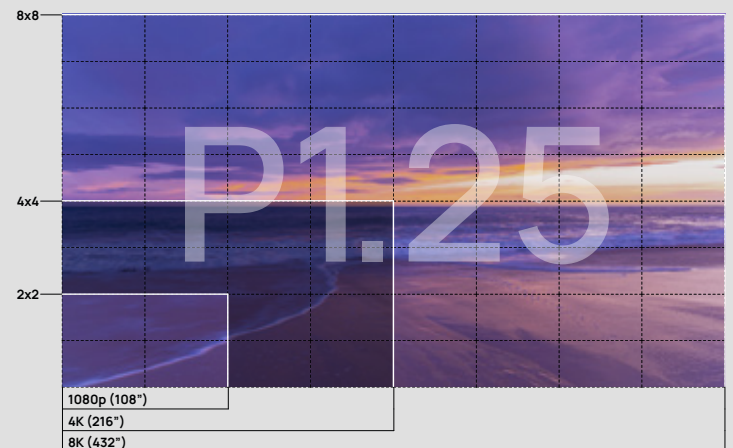



Upto 40% Energy Saving*



Pixel Types: SMD, COB, IMD, MIP



HDR Capable



16-bit Grayscale



2 Mounting methods:
Direct wall or Vesa



Modular Formation



100,000 Hours + Lifetime



Slim Design (28mm)



Front Service



GOB -
ultimate pixel protection technology



Light Weight



160° Viewing Angles



16:9 Cabinet



Connect Model:
Direct HDMI connection
(up to 1080p resolution)

**BUSINESS
COURSE
ONLINE**

PROVIDES EVERYONE WITH THE CHANCE TO NETWORK
WITH PEERS FROM AROUND THE WORLD.


The 54" EDGE Pro uses four times fewer internal components compared to traditional LED display technologies. In addition to its energy-saving properties, it also reduces the amount of raw materials used during the manufacturing process.

Two mounting methods

Having the freedom to attach a LED display to an existing mounting solution can make a big difference. The industry standard VESA or wall mounting options enables the EDGE platform to be attached in a matter of seconds for quick and easy mounting.

Simplified installs

The 54" EDGE Pro, with its large die-cast cabinets, significantly reduces the need for cabinet fettling and mechanical adjustments. This enables fast and precise cabinet alignment, ensuring a perfectly uniform display with minimal effort.

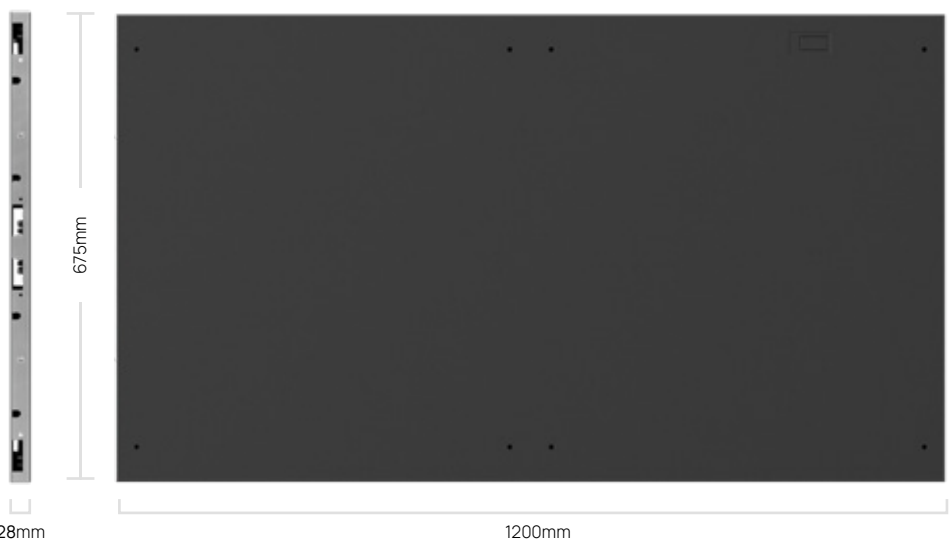



Corporate



Control Room



Immersive



Digital Signage

SPECIFICATIONS

COB (MicroLED)					
Pixel Pitch (mm)	0.625	0.78	0.93	1.25	1.56
Module Size (W+H)	150x168.75mm 23.62x6.64in				
Module Resolution (W+H)	240x270	192x216	160x180	120x135	96x108
Cabinet Resolution (W+H)	1920x1080	1536x864	1280x720	960x540	768x432
Cabinet Size (W+D+H)	1200x28x675mm 47.24x1.1x26.57in				
Pixel Types	COB				
Material	Die-cast Aluminium				
Cabinet Weight (kg/lbs)	17.5 / 38.58				
Cabinet Flatness	≤0.1mm				
Brightness	≤800cd/m ² (adjustable)				
Colour Temperature	2000 ~ 12000 (adjustable)				
Viewing Angle (H/V)	160°				
Centre Distance Deviation of Luminescent Point	< 3%				
Contrast Ratio	≤1,000,000:1				
Peak Power Consumption (W/m ² / W/ft ²)	≤600/55.74	≤600/55.74	≤500/46.45	≤450/41.80	≤450/41.80
Average Power Consumption (W/m ² / W/ft ²)	≤240/22.30	≤240/22.30	≤200/18.58	≤180/16.72	≤180/16.72
Power Supply	AC100 ~ 240V (50~60Hz)				
Driving Mode	Constant current drive				
Frame Frequency	50/60Hz				
Refresh Rate	3840Hz				
Gray Scale	16bit				
Operating Temperature (°C / °F)	-10 ~ +40 / +14 ~ +104				
Operating Humidity	10% ~ 80%RH anti-fog				
Service Life	≤100,000Hrs				
Maintenance Mode	Front maintenance				

*40% energy saving is calculated vs SMD technology when the 54" EDGE Pro display is run at a comparable brightness of 600nits

*All data contained is subject to change.



LED display technology
for tomorrow's world. ↵

Please contact us if you have any questions,
we're always happy to help

www.theledstudio.com
sales@theledstudio.co.uk

UK Showroom

The Pavilion
Merchant Square
London, W2 1JZ
United Kingdom

Tel: +44 (0) 20 3832 9500

Head Office

Unit 3 Clearwater Business Park
Frankland Road
Swindon, SN5 8YZ
United Kingdom

Tel: +44 (0) 20 3852 9500

EMEA Office

169-171 Makarios III Avenue
Cedars Oasis Tower
3027, Limassol
Cyprus

Tel: +357 9625 8848

USA Office

22 Boston Wharf Road,
7th Floor,
Boston, MA 02210
United States

Tel: +1 (833) 533-7836

USA Showroom

123 Heiman Street, Suite 200,
San Antonio,
Texas 78205
United States

Tel: +1 (833) 533-7836