



# VIVID (MicroLED)

UNRIVALLED VISUAL EXPERIENCES



## COB COMMON CATHODE TECHNOLOGY

### Exceptional Image Quality

Experience unmatched clarity and superior image processing with our VIVID MicroLED Display, the ultimate solution for those who demand nothing but the best in visual technology.

Whether you're looking to elevate your immersive experiences, enhance your corporate presentations, or captivate audiences in artistic installations, the VIVID MicroLED Display delivers unparalleled performance and clarity.



#### DCI-P3 Colour

Elevate visual experiences to new heights with our cutting-edge LED display, now DCI-P3 compliant.

Designed to deliver unparalleled colour brilliance and accuracy, this state-of-the-art technology sets the stage for captivating and immersive experiences like never before.

DCI-P3

#### ≤1,000,000:1 Contrast Ratio

Designed to awe and inspire, the VIVID's industry-leading contrast ratios and HDR capabilities transport you to a realm where every image bursts with life, immersing you in a breathtaking tapestry of colours and details.

#### Up to 40% energy savings with VIVID COB!

COB, Flip-Chip and Common Cathode technologies combine to create one of the most advanced, energy efficient, fine pitch displays on the market.



Ultra slim profile -  
28 mm



Superior thermal  
performance



Super-wide  
viewing angle



3840Hz



Up to 40%  
energy saving\*



Market leading  
image quality



Pixel protection  
technology



≤1,000,000:1  
contrast



Common cathode  
technology



### Cool To The Touch


Thanks to the VIVID's low BTU output, there's no need to cool the surrounding environment, translating to significant cost savings often overlooked, like air conditioning expenses. Elevate your displays while being environmentally and budget-conscious.

## Fixed Resolutions & Custom Sizes

21.6" CABINET ARRAYS



27" CABINET ARRAYS

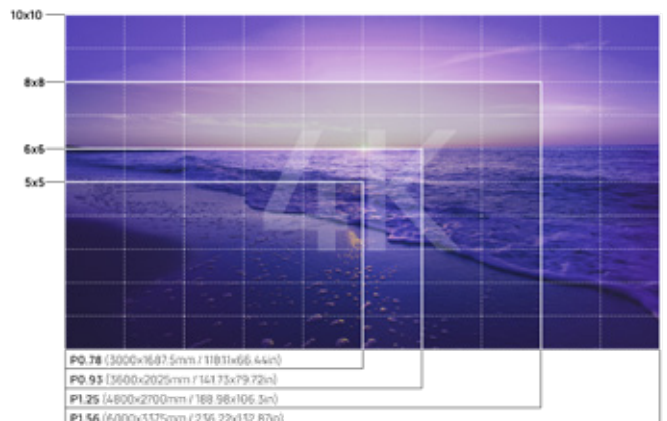

## Cabinet Sizes



Home Cinema



Showroom

## Specifications

21.6" Cabinet				
Pixel Pitch (mm)	0.75	1.0	1.25	1.56
Cabinet Size (W+H+D)	480x270x28mm 18.89x10.62x1.1in			
Cabinet Weight (kg/lbs)	3.1 / 6.83			
Cabinet Resolution (W+H)	640x360	480x270	384x216	320x180
Aspect Ratio	16:9			
Brightness	≤800 nits			
Contrast Ratio	≤1000000:1			
Refresh Rate	≤3840Hz			
Frame Frequency (Hz)	60 / 120(3D)			
View Angle	178° / 178°			
Colour Temperature (K)	3,200 ~ 10,000			
Grey-scale	14 bit			
Max Power Consumption (W/m <sup>2</sup> / W/ft <sup>2</sup> )	≤470/44	≤245/23	≤245/23	≤245/23
Average Power Consumption (W/m <sup>2</sup> / W/ft <sup>2</sup> )	≤235/22	≤125/12	≤125/12	≤125/12
Working Voltage	AC100 ~ 240V (50~60Hz)			
Lifetime Hours	100,000Hrs			
Operating Temperature (°C / °F)	-20 ~ +60 / -4 ~ +42			
Operating Humidity	10% ~ 90%RH			
IP Rating	Indoor			
Certification	CE, ETL			

27" Cabinet					
Pixel Pitch (mm)	0.78	0.94	1.25	1.56	1.875
Cabinet Size (W+H+D)	600x337.5x28mm 23.62x13.28x1.1in				
Cabinet Weight (kg/lbs)	5.2 / 11.46				
Cabinet Resolution (W+H)	768x432	640x360	480x270	384x216	320x180
Aspect Ratio	16:9				
Brightness	≤800 nits				≤1000 nits
Contrast Ratio	≤1000000:1				
Refresh Rate	≤3840Hz				
Frame Frequency (Hz)	60 / 120(3D)				
View Angle	178° / 178°				
Colour Temperature (K)	3,200 ~ 10,000				
Grey-scale	14 bit				
Max Power Consumption (W/m <sup>2</sup> / W/ft <sup>2</sup> )	≤400/37	≤400/37	≤330/31	≤330/31	≤490/46
Average Power Consumption (W/m <sup>2</sup> / W/ft <sup>2</sup> )	≤150/14	≤150/14	≤150/14	≤150/14	≤250/23
Working Voltage	AC100 ~ 240V (50~60Hz)				
Lifetime Hours	100,000Hrs				
Operating Temperature (°C / °F)	-20 ~ +60 / -4 ~ +42				
Operating Humidity	10% ~ 90%RH				
IP Rating	Indoor				
Certification	CE, ETL				

\*40% energy saving is calculated vs SMD technology when the VIVID display is run at a comparable brightness of 600nits

\*All data contained is subject to change based on project requirements.

Contact us: +44 (0)20 3832 9500

[www.theledstudio.com](http://www.theledstudio.com)

Version 1.5

LEDstudio



LED display technology  
for tomorrow's world. ↵

Please contact us if you have any questions,  
we're always happy to help

[www.theledstudio.com](http://www.theledstudio.com)  
[sales@theledstudio.co.uk](mailto:sales@theledstudio.co.uk)

**UK Showroom**

The Pavilion  
Merchant Square  
London, W2 1JZ  
United Kingdom

Tel: +44 (0) 20 3832 9500

**Head Office**

Cromwell Place  
Lime Tree Way  
Basingstoke, RG24 8YJ  
United Kingdom

Tel: +44 (0) 20 3852 9500

**EMEA Office**

169-171 Makarios III Avenue  
Cedars Oasis Tower  
3027, Limassol  
Cyprus

Tel: +357 9625 8848

**USA Office**

22 Boston Wharf Road,  
7th Floor,  
Boston, MA 02210  
United States

Tel: +1 (833) 533-7836

**USA Showroom**

123 Heiman Street, Suite 200,  
San Antonio,  
Texas 78205  
United States

Tel: +1 (833) 533-7836